



TRUWOOD ADOBE™ PANEL SIDING

FEATURES/BENEFITS

Natural stucco appearance: Provides the look of stucco without the hassle, high cost or lengthy cure time.

Quality engineered surface and core: TruWood Siding is designed specifically to eliminate splitting, cracking and checking. It is also free of knots, resulting in a more attractive finished project.

Pre-primed for improved weather-ability: TruWood Siding is primed to provide a consistent surface ready to accept paint. TruWood's industry leading coating technology ensures uniformly primed boards for added weather protection while providing an excellent surface for exterior topcoats.

4' x 8' panels: Panels are sized for optimal versatility. The 1/2" thickness produces a solid panel.

Best protective packaging available: TruWood protects your investment with premium packaging that reduces damage and provides for easy handling.

Trained field representatives: TruWood reps provide technical support and jobsite application training.

30-year limited warranty: Collins Products offers the best warranty in the industry and it's fully transferable. See complete warranty for details.

Availability: Field inventories are available through a convenient local distribution network to ensure siding is delivered where and when you need it.

Trim: Matching reversible TruWood Trim is also available.

TruWood® SIDING

DESCRIPTION

TruWood Adobe™ 1/2" Panel Siding offers the attractive visual appeal of stucco and the easy application of panel siding. It is engineered to be more resistant to damage than today's stucco and you don't have to worry about added masonry cost or the inconvenience of a lengthy curing time. Paint goes on smoothly and uniformly. The result is a high quality appearance that enhances the architectural appeal of any home.

TruWood Siding has combined competitive price and high quality to set a new industry standard for value. Expert craftsmanship and proven performance make TruWood Siding an excellent choice for today's quality and value conscious builders.


USES

TruWood Siding is designed for use in residential single-family and multi-family housing and adds style to remodeling and light commercial projects. Whether you are a professional builder or a do-it-yourselfer, TruWood Siding delivers style and impact to all your outside building projects.

**TRUWOOD ADOBE®
PANEL SIDING**

**TruWood®
SIDING**

**FOR COMPLETE INSTALLATION INSTRUCTIONS,
MAINTENANCE AND WARRANTY INFORMATION,
GO TO WWW.COLLINSWOOD.COM**

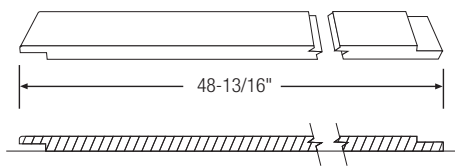

Adobe 1/2" Panel Siding
Shiplapped Edge

Manufactured by
COLLINS PRODUCTS LLC
TRUWOOD SIDING & TRIM
6410 Hwy 66
Klamath Falls, OR 97601

Sales: **800.417.3674**
Warranty: **800.329.1219**
www.CollinsWood.com



Specifications:

TruWood Siding meets the requirements of the following codes and standards:

2006 International Residential Code (IRC)

International Building Code

Federal Manufactured Housing Standards

ICC ER-2319

American National Standard ANSI-CPA 135.6 and other applicable codes and standards

California Wildland-Urban Interface (WUI) – must follow special WUI requirements



Member of The Composite Panel Association

Fire rating = Class C, R Value = 0.67 (hour) (sq. ft.) (Fahrenheit) per BTU

Racking, when installed in accordance with ICBO ER-2319:

1/2" Panel Siding = 202 Shear Value

The approximate weight: 1/2" Panel Siding = 2,070 Lbs./MSF

TruWood Panel Siding is shipped 20 units per truckload or 60 units per railcar.

Lap Size	Pc/ Unit	Sq. Ft./ Unit	Approx. Coverage Sq. Ft./ Unit	Approx. Sq. Ft. Needed To Cover 1,000 Sq. Ft. Of Wall Area*	Approx. Weight Lbs./Unit
1/2" x 4' x 8'	37	1,184	1,066	1,100	2,400

*Assumes a 10% waste factor for cutting and fitting.

Adobe panels are shiplapped on the long edges and cut oversize to provide 48" net coverage when applied.

Service

For more information on this, or other TruWood products, please contact your nearest TruWood distributor. For locations, call **1.800.417.3674**.

Or write:

Collins Products LLC
TruWood Siding & Trim
6410 Hwy 16
Klamath Falls, Oregon 97601